
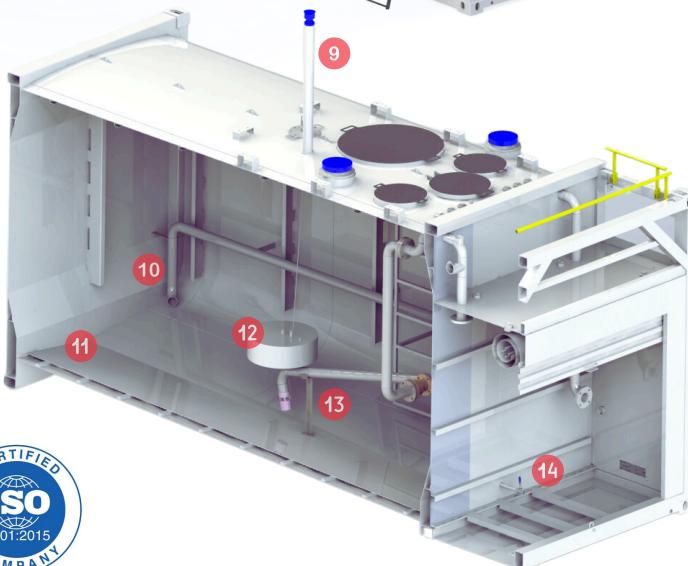


FUELCO AVIATION

Self Bunded Tanks

LTAV Range

10,948- 68,000L

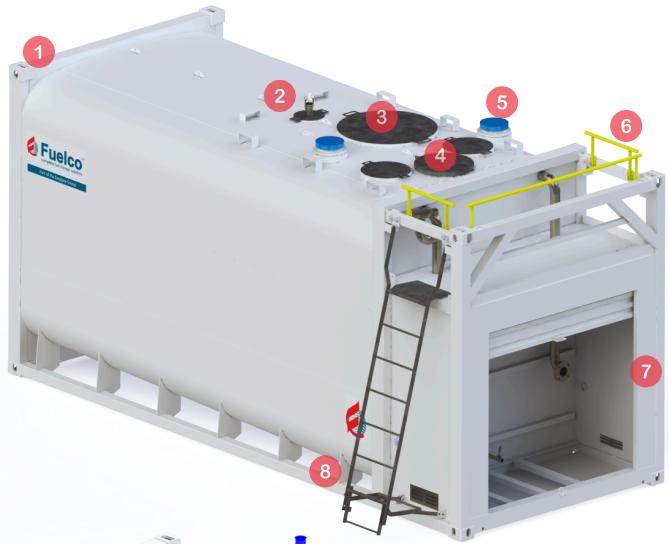

- ① **ISO LIFTING POINTS**
Simplifying crane handling
- ② **FLOATING SUCTION INSPECTION HATCH**
With jiggle wire to access the suction float
- ③ **SECURE MANWAY WITH LADDER**
Providing access to tank for cleaning and inspections
- ④ **DIP HATCH**
With primary and interstitial dip
- ⑤ **EMERGENCY VENTING**
To protect the tank against over pressurization
- ⑥ **GUARD RAIL**
Ensures safety of the personnel
- ⑦ **SECURE WEATHER PROOF CABINET**
Keeps the fuel equipment safe and secure
- ⑧ **FOLD AWAY ACCESS LADDER**
Interchangeable on either side
- ⑨ **WORKING VENT**
With stainless steel mesh
- ⑩ **FILLING LINE**
At high end with angled outlet
- ⑪ **SLOPED FLOOR**
30:1 to ensure water accumulation at low point
- ⑫ **FLOATING SUCTION**
Ensures that product is always drawn from the top
- ⑬ **STAINLESS STEEL SUCTION LINE SUPPORT**
Prevents the suction line from reaching the tank floor
- ⑭ **LOW POINT DRAIN**
Allows simple drain\low point sample checking

Standard accessories include:

- Low point with water extraction line
- Stainless Steel fittings
- Overfill protection and electronic overfill alarm
- Galvanised tank trim to prevent nicks and scratches
- Pump bays designed to accept FUELCO pump packages
- Access platform to all ports and manway

The LTAV range is a heavy duty self-bunded design, developed specifically for the safe storage and handling of aviation fuels

Fuelco, an ISO 9001 Certified Company


FUELCO AVIATION

Self Bunded Tanks

LTAV Range



10,948- 68,000L

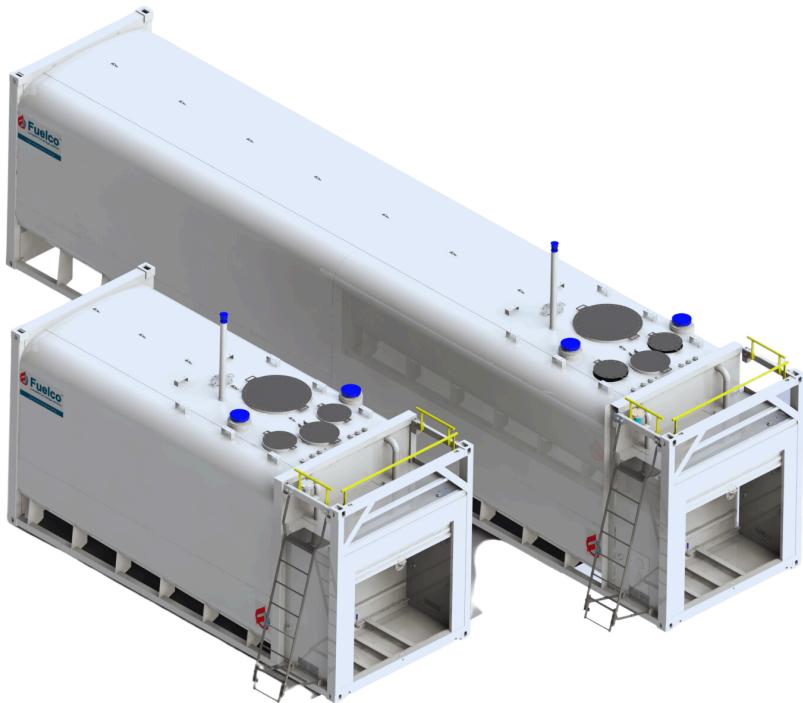

| Tank Code Stainless Steel | Tank Code Epoxy Coated | Pumpbay | Size | Capacity (GFL) | | | Dimensions (mm) | | | Tare Weight | Compliance |
|------------------------------|---------------------------|---------|------|----------------|--------|--------|-----------------|-------|--------|----------------|--|
| | | | | L | USG | IG | Length | Width | Height | | |
| LTAV - SS10 | LTAV - EC10 | Yes | 10ft | 10,948 | 2,892 | 2,408 | 2,991 | 2,438 | 2,896 | 4,700 | AS1692 JIG 1 AS1657 JIG-2 JIG-4 EI1540 UL142 ULC S601 |
| LTAV - SS23 | LTAV - EC23 | Yes | 20ft | 23,500 | 6,208 | 5,169 | 6,058 | 2,438 | 2,896 | 7,300 | |
| LTAV - SS28 | LTAV - EC28 | Yes | 20ft | 28,250 | 7,436 | 6,214 | 6,058 | 2,438 | 2,896 | 7,200 | |
| LTAV - SS34 | LTAV - EC34 | No | 20ft | 35,200 | 9,299 | 7,743 | 6,058 | 2,438 | 2,896 | 7,300 | |
| LTAV - SS58 | LTAV - EC58 | Yes | 40ft | 59,200 | 15,639 | 13,022 | 10,341 | 2,438 | 2,896 | 11,800 | |
| LTAV - SS62 | LTAV - EC62 | Yes | 40ft | 62,500 | 16,511 | 13,748 | 12,192 | 2,438 | 2,896 | 12,000 | |
| LTAV - SS68 | LTAV - EC68 | No | 40ft | 68,000 | 17,964 | 14,958 | 12,192 | 2,438 | 2,896 | 12,100 | |

Disclaimer: Information and photographs shown are for marketing purposes only. Actual product may vary to images shown due to continual improvement processes, design changes and optional extras

AUSTRALIA

+61 3 9775 1366
sales@fuelco.com.au
www.fuelco.com.au

MENA

+971 4 232 6985
sales@fuelco.ae
www.fuelco.ae

EUROPE \ UK

+44 1 5279 11787
sales@fuelco.uk
www.fuelco.uk

AFRICA

+27 16 421 8043
sales@fuelco-sa.com
www.fuelco-sa.com